
# PAR36 SERIES DATA SPECIFICATION SHEET



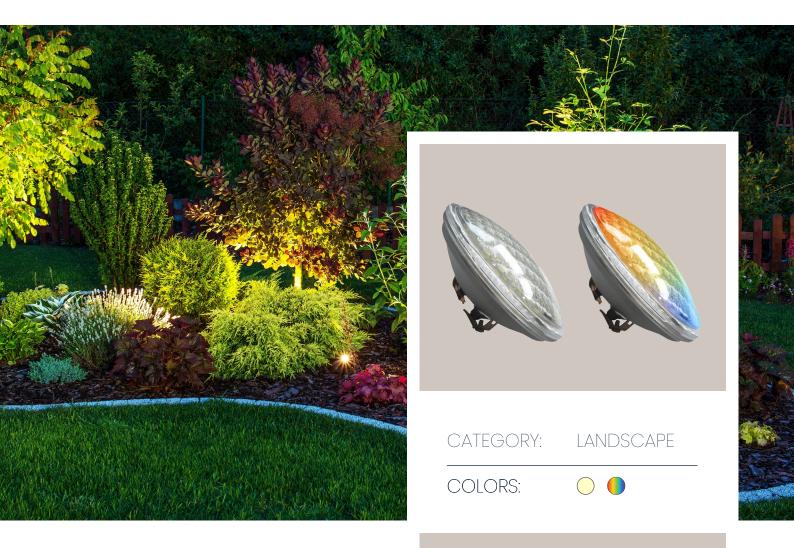

### PRODUCT OVERVIEW

## LED Replacement Modules — PAR36 Series

The Tru-Scapes® PAR36 Series LED Lamps are energy-efficient, long-lasting replacements for traditional PAR36 halogen bulbs. Designed for durability and performance, they're ideal for landscape and well lights.

Available in Warm White or App-Controlled RGBCW for full color versatility.

2700K

RGBCW 2700-6500K






#### **SPECIFICATIONS**

- > Installation: Drop-in Replacement
- > Glass or Lens: Clear Temper Glass Lens
- > Light Source:
  - PAR36: 8W, 0.75 PF, 900 Lumens
  - RGBCW PAR36: 8W, 0.75 PF, 680 Lumens
- > Color Temperature:
  - PAR36: 2700K
  - RGBCW PAR36: 2700k 6500k (RGB With App)
- Dimensions: 2.87" x 4.37" x 4.37"
- > Recommended Lamp Rating: 8W
- > Operating Voltage: 12V AC
- > Beam Angle: 120
- Powered By: Low Voltage Transformer (Sold Separately)

#### FEATURES & BENEFITS

- > Energy-saving alternative to traditional halogen PAR36 lamps
- Instant-on LED with long lifespan and minimal maintenance
- Durable, weather-resistant design for outdoor environments
- > Easily replaceable lamp.
- > Low energy consumption Low Voltage LED Design.
- > Heat resistant temper glass lens.
- Available in static Warm White or full RGBCW color-changing
- RGBCW version compatible with Tru-Scapes Color Control App

#### PRODUCT DIMENSIONS



#### WARRANTY

- Tru-Scapes Lighting Sockets have a Lifetime Warranty.
- Light fixtures of brass, copper or stainless steel, aluminum, including finishes are warranted for five (5) years.
- > LED Bulbs are warranted for five (5) years or 30,000 hours, whichever comes first.
- Stainless Steel, Painted and Weatherproof (plastic housing) transformers, excluding timers and photo cells, are warranted for five (5) years for the original purchaser.
- Tru-Scapes warranties do not cover plants that die or burn because of continuous light shined on them. This is not a defect, but the inherent nature of such plants. Certain acid loving plants such as arborvitae, pine trees, and others must not be exposed to light of any kind for more than 18 hours a day as these plants need time to sleep and allow photosynthesis to naturally occur.
- > Low voltage landscape lighting fixture housings made of brass do naturally patina in color which is not a defect. (Please see www.Tru-Scapes.com for cleaning instructions.)
- See our full Warranty details at www.Tru-Scapes.com/faq.

#### **CERTIFICATIONS**



Indicates the product meets safety standards tested by Intertek.



Ensures the product is dust-tight and highly water-resistant.

#### **CONTACT US**

© Copyright 2024, Tru-Scapes ® Registered Trademark• Bucks County, PA • All Rights Reserved• contacts@tru-scapes.com 1-800-878-1240

WWW.TRU-SCAPES.COM